

The Versatile P.O.S. 15" TFT LCD Color Monitor

TVS
VIDEO SOLUTION PROVIDER
SINCE 1983



**RoHS
Compliance**

Brilliant Black and OA White
Two Colors Optional



Cable management
(for touch version only)



**Stand Base With Tilt
90° Adjustment
Type B**



**Card Reader
Version**



VESA Wall Mounting
Meet VESA Standard (75x75mm)
With Mounting Plate Specification.



"i-touch" Auto Adjustment
The Intelligent One Touch Key, Automatically Set
Your Monitor to Optimal Position.

Features:

- ▶ Full 15" viewable display
crisp image
- ▶ On screen display easy to
use
- ▶ Auto scaling function simply
" i-touch "
- ▶ Stand base design for different
viewing angles
- ▶ Ideal for POS/Kiosk users and
windows application
- ▶ Power consumption 27W/3W DPMS
- ▶ State-of-the-art design
- ▶ Touch version availability
- ▶ Card reader version availability
- ▶ Anti-reflection strengthen glass availability
- ▶ Cable management for neat installation
(Touch version only)



ISO 9001
ISO 14001



The Versatile P.O.S. 15" TFT LCD Color Monitor



MODEL		LP-15Rxx
Panel *	Viewing Area	15"
	Resolution	1024(H) x 768(V) XGA
	Color	16,777,216
	Viewing Angle	Horizontal: 140° & Vertical: 125°
	Response Time Tr+Tf	5+11 ms
	Contrast Ratio	500 : 1
	Brightness	250 cd/m ² (195 cd/m ² with Touch)
Video Input	VGA Signal	R/G/B Analog VGA
	Scan Frequencies	H: 31.5K ~ 60KHz V: 56 ~ 75 Hz
Control	Power	On / Off with LED Indicator
	OSD	OSD Control with "i-touch" auto scaling
Power Adaptor	Input	AC Input 100 ~ 240 V, 50 / 60 Hz
	Output	DC +12 V
Power	Management	VESA DPMS Standard
	Consumption	27W / Stand by 3W
Environment	Temperature	0°C ~ 40°C
	Humidity	10% ~ 85% (20%~85% for MSR)
Safety & EMI		FCC-B, ETL, ETLC, CE, TÜV, CCC, BSMI
Applications		POS, Banking, ATM, IPC, TML, Web IA, Mini PC, ...etc
Optional		
	Touch Panel	Resistive (4 or 5 Wires) / USB or RS-232 interface
	Glass	Anti-Reflection Strengthen Glass
	Card Reader	300,000 Pass
	Cabinet Color	White or Black

Stand Base (0°~ 90°)
Standard Plate With Patent Tilt Adjustment 0°~ 90° is
Designed for Different Viewing Angles of Various Applications.
Ideal for Touch Screen Operation

Optional



Touch Screen



Anti-Reflection
Strengthen Glass







Card Reader Version

* Panel Spec. depends on MFC

Specification is subject to change without notice.

Unit:mm

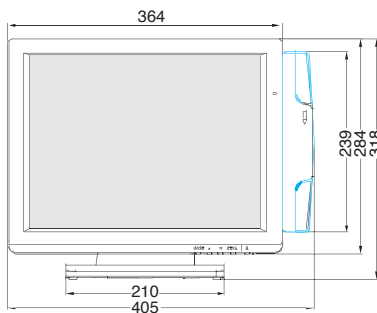

■ Card Reader Version